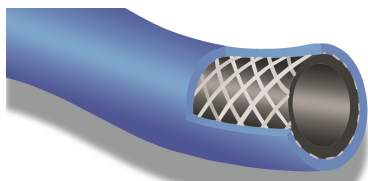


Blue Airline


Recommended Usages:

General purpose PVC for use of air & water. Primarily used for airline / air tools.

Cover:

Blue Smooth UV Stabilised PVC

Reinforcement:

Woven Polyester Yarn

Tube:

Black Smooth Oil Mist Resistant PVC

Temperature Range:

-5° to 50° C

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A46-006	6	13	232	20, 100
A46-008	8	15	232	20, 100
A46-010	10	17	232	20, 100
A46-012	12	19	232	20, 100

TPR Food Grade


Recommended Usages:

For use of industrial air, oil, water, light chemicals
Food contact to AS2070

Cover:

Clear Smooth UV Stabilised PVC

Reinforcement:

Woven Polyester Yarn

Tube:


Clear Smooth Oil Resistant PVC

Temperature Range:

0° to 50° C

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A47-006	6	11	232	20,100
A47-008	8	13	232	20,100
A47-010	10	15	232	20,100
A47-012	12	18	232	20,100
A47-016	16	22	232	20,100
A47-020	19	28	232	20,100
A47-025	25	34	232	20,100
A47-032	32	42	232	20,100
A47-038	38	50	232	20,40

Yellow Air + Water

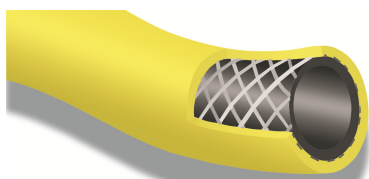

Recommended Usages:

Flexible PVC hose for industrial air & water

Cover:

Yellow Ribbed UV Stabilised PVC

Reinforcement:

Woven Polyester Yarn

Tube:


Black Smooth Oil Mist Resistant PVC

Temperature Range:

0° to 60° C

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A43-006	6	12	260	20, 100
A43-008	8	14	260	20, 100
A43-010	10	17	260	20, 100
A43-012	12	20	260	20,100
A43-020	19	28	200	20,100
A43-025	25	35	200	20,100
A43-032	32	42	200	20,60
A43-038	38	52	200	20,40
A43-050	50	63	200	20,40

Yellow / Blue Air + Water

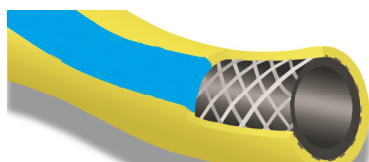

Recommended Usages:

Flexible PVC hose for industrial air & water

Cover:

Yellow / Blue Ribbed UV Stabilised PVC

Reinforcement:

Woven Polyester Yarn

Tube:


Black Smooth PVC

Temperature Range:

0° to 60° C

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A53-006	6	13	230	20,100
A53-008	8	15	230	20,100
A53-010	10	17	230	20,100
A53-012	12	19	230	20,100
A53-020	19	29	230	20,100
A53-025	25	35	230	20,100
A53-032	32	43	230	20,60
A53-038	38	50	230	20,40
A53-050	50	64	230	20,40

Clear Vinyl Tubing

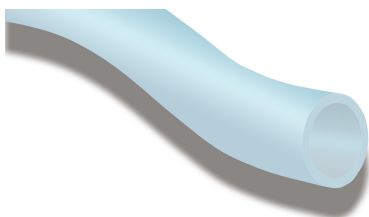
Recommended Usages:

Non toxic clear tube, for use in low pressure transfer of water and beverage products. Food contact to AS2070

Tube:


Clear PVC Tube

Temperature Range:

-10° to 60° C

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A15-003	3	5	116	30
A15-005	5	8	100	30
A15-006	6	9	87	30
A15-008	8	11	72	30
A15-010	10	13	58	30
A15-012	12	15	58	30
A15-016	16	19	58	30
A15-020	19	23	43	30
A15-025	25	31	43	30
A15-032	32	38	29	30
A15-040	40	48	29	15
A15-050	50	60	29	15

White Washdown

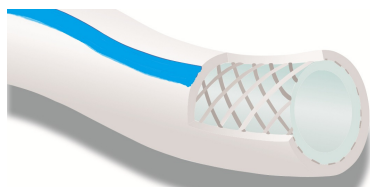
Recommended Usages:

Cold Water Wash Down used for dairy, food industries, horticultural & **deck wash**.

Cover:

White Smooth UV Stabilised PVC with Blue Stripe

Reinforcement:

Woven Polyester Yarn

Tube:


White Smooth PVC

Temperature Range:

-5° to 60° C

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A55-020	19	26	150	20,100
A55-025	25	35	150	20,100
A55-032	32	43	150	20,100
A55-038	38	52	150	20,60


Air Breathing

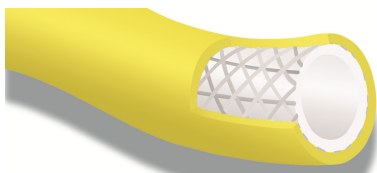

Recommended Usages:
Air Breathing

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A10-008	8	14.4	348	100,300
A10-010	10	17.6	348	100,300

Drinking Water

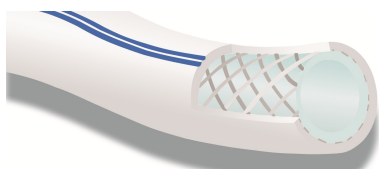

Recommended Usages:
Drinking Water for Caravans
& Boating Industry

Cover:

Clear PVC

Reinforcement:

Woven Polyester Yarn

Tube:


Polyolefin

Temperature Range:

-5° to 60° C

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A18-012	12	18	145	20,100

Fire Reel

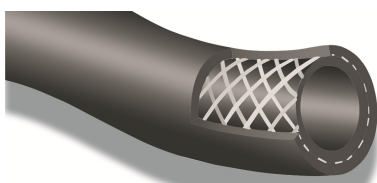

Recommended Usages:
Black PVC Hose suitable for
Fire Reels.

Cover:

Black PVC

Reinforcement:

Woven Polyester Yarn

Tube:

Black PVC

Temperature Range:

0° to 60° C

Product Code	I.D. mm	O.D. mm	W.P PSI	Coil/ MT
A09-020	19	26	145	36,100
A09-025	25	34	145	36,100